

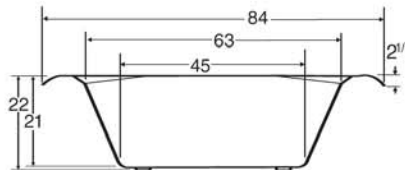


Always check our website for the most updated specifications: [www.americh.com](http://www.americh.com)

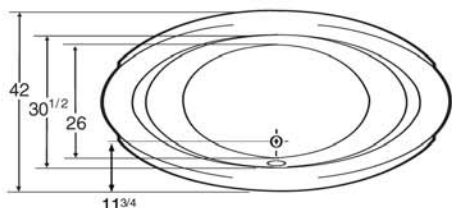

Tub pictured with optional waste & overflow.

All bathtub dimensions are  $\pm 1/2$ ".

**CODES AND COMPLIANCE**

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8 • ASTM F462-79

Contact Americh for additional approvals.

**DIMENSIONS**

84" x 42" x 21" deep (2134 x 1067 x 533 mm)  
 Whirlpool Operating Gallons = 70 (Liters = 308)  
 Gallons to Overflow = 84 (Liters = 370)

**ELECTRICAL REQUIREMENTS**





Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

**Builder Series**

**Luxury Series**



**Platinum Series**

**Combination (pump and blower location only)**



**Airbath System II**

**Airbath System III**



**LEGEND:**

- PUMP
- BLOWER
- JET
- ROTARY JET
- DUAL SUCTION
- LIGHT
- ON/OFF CONTROL
- GRAB BAR
- ACCESS PANEL (MINIMUM 16" x 20")

| A C C E S S O R I E S |           |     |     |         |      |        |     |       |                      |              |             |              |            |
|-----------------------|-----------|-----|-----|---------|------|--------|-----|-------|----------------------|--------------|-------------|--------------|------------|
| Apron                 | Grab Bars |     |     |         |      | Pillow |     |       |                      | Neck Massage | Tile Flange | Installation |            |
|                       | 9"        | 14" | 16" | Madison | Rail | 13"    | 17" | Angle | Head Support Systems |              |             | Deck Mount   | Undermount |
|                       |           |     |     |         |      | •      |     |       | •                    | •            |             | Yes          | No         |

• = option is available    ■ = standard on Platinum Series    □ = option is not available

**INSTALLATION TIPS**

- Install product according to our Owners manual and local codes.
- All units with an Airbath III may be 1 1/2 - 2 1/2" higher than stated.
- All whirlpool or Airbath™ unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- For oval or specialty shapes. Americh recommends you wait until you have the actual unit or contact us for a template.