



TORRENTO

Wet Location Fan

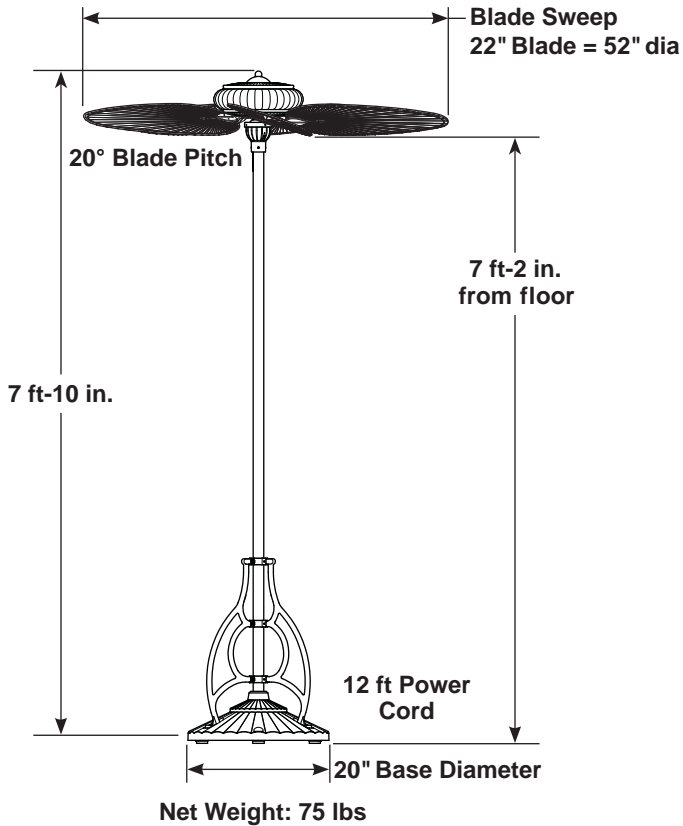

**Available Fan Finishes

AZ	Aged Bronze
----	-------------

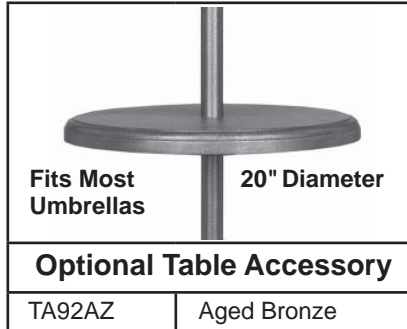

Available Plastic Blades

Woven Bamboo	BPD4A	Antique - 22" Narrow Oval
--------------	-------	---------------------------

INSTALLATION REQUIREMENTS:

Base of fan must be secured to floor using one of the following methods: Three 3/8"-7/16" lag screws are included for wood floor applications. 3/8"-7/16" lag bolt/lag shields are included for concrete floor applications.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit with Ground Fault Protection. 12 ft power cord with 3-prong plug is included. Can be hard-wired directly to "weather-tight" junction box.

FAN SPEED:

3-speed pull-chain with reversing switch (on the motor). Approximate speeds (depending on blade selection)
1st Pull-High – 145 rpm; 2nd Pull-Med – 95 rpm; 3rd Pull-Low – 60 rpm;

DAMP / WET LOCATION:

Fan rated for both Damp & Wet Location usage.