


Always check the website for the most updated specifications: [www.americh.com](http://www.americh.com)

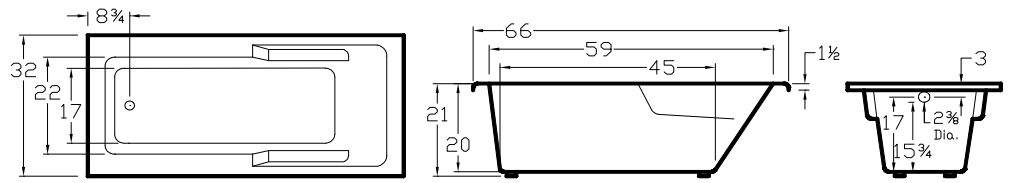

Tub pictured with optional grab bars and waste & overflow.

All bathtub dimensions are  $\pm 1/2''$ .

### CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8 • ASTM F462-79

Contact Americh for additional approvals.

### DIMENSIONS

66" x 32" x 21" deep (1676 x 813 x 533 mm)  
 Whirlpool Operating Gallons = 40 (Liters = 151)  
 Gallon to Overflow = 60 (Liters = 227)

### ELECTRICAL REQUIREMENTS





Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

### Builder Series

### Luxury Series



### Platinum Series

### Combination (pump and blower location only)



### Airbath System II

### Airbath System III



**LEGEND:**

- P PUMP
- B BLOWER
- JET
- ROTARY JET
- DUAL SUCTION
- LIGHT
- ON/OFF CONTROL
- GRAB BAR
- ACCESS PANEL (MINIMUM 16" X 20")

## ACCESSORIES





Apron	Grab Bars					Pillow				Neck Massage	Tile Flange	Installation	
	9"	14"	16"	Madison	Rail	13"	17"	Angle	Head Support System			Deckmount	Undermount
•				•	•	•		•	•	•	•	Yes	Yes

• = option is available    
  = standard on Platinum Series    
  = option is not available

### INSTALLATION TIPS

- Install product according to Owners Manual and local codes.
- All units with an Airbath III may be 1 1/2 - 2 1/2" higher than stated.
- Any whirlpool or Airbath® unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- When ordering for undermount installation, always advise Americh to assure there are no issues with deck mounted controls.
- Cut out dimension: 64" x 30"

Always check our website for the most updated specifications: [www.americh.com](http://www.americh.com)

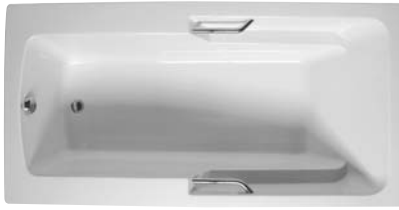

Tub pictured with optional grab bar and waste & overflow.

All bathtub dimensions are  $\pm 1/2$ ".

**CODES AND COMPLIANCE**

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8 • ASTM F462-79

Contact Americh for additional approvals.


**DIMENSIONS**

66" x 34" x 20" deep (1676 x 864 x 508 mm)  
 Whirlpool Operating Gallons = 40 (Liters = 151)  
 Gallons to Overflow = 73 (Liters = 276)


**ELECTRICAL REQUIREMENTS**

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.


**Builder Series**




**Luxury Series**




**Platinum Series**




**Combination**  
(pump and blower location only)



**Airbath System II**



**Airbath System III**



**LEGEND:**

- PUMP
- BLOWER
- JET
- ROTARY JET
- DUAL SUCTION
- LIGHT
- ON/OFF CONTROL
- GRAB BAR
- ACCESS PANEL (MINIMUM 16" x 20")




A C C E S S O R I E S													
Apron	Grab Bars				Pillow				Head Support Systems	Neck Massage	Tile Flange	Installation	
	9"	14"	16"	Madison	Rail	13"	17"	Angle				Deck Mount	Undermount
•				•	•	•		•	•	•	Yes	Yes	

• = option is available     = standard on Platinum Series     = option is not available

**INSTALLATION TIPS**

- Install product according to our Owners manual and local codes.
- All units with an Airbath III may be 1 1/2 - 2 1/2" higher than stated.
- All whirlpool or Airbath™ unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- When ordering for undermount installation, always advise Americh to assure there are no issues with deck mounted controls.
- Cut-out dimension: 64" x 32"

Always check our website for the most updated specifications: [www.americh.com](http://www.americh.com)

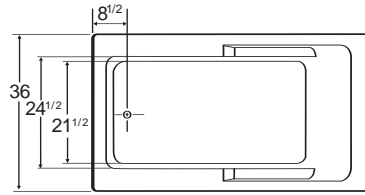

Tub pictured with optional grab bar and waste & overflow.

All bathtub dimensions are  $\pm 1/2"$ .

**CODES AND COMPLIANCE**

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8 • ASTM F462-79

Contact Americh for additional approvals.

**DIMENSIONS**

66" x 36" x 20" deep (1676 x 914 x 508 mm)


Whirlpool Operating Gallons = 45 (Liters = 170)

Gallons to Overflow = 80 (Liters = 303)


**ELECTRICAL REQUIREMENTS**

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.


**Builder Series**




**Luxury Series**




**Platinum Series**




**Combination (pump and blower location only)**



**Airbath System II**



**Airbath System III**



**LEGEND:**

- PUMP
- BLOWER
- JET
- ROTARY JET
- DUAL SUCTION
- LIGHT
- ON/OFF CONTROL
- GRAB BAR
- ACCESS PANEL (MINIMUM 16" x 20")

ACCESSORIES													
Apron	Grab Bars					Pillow				Neck Massage	Tile Flange	Installation	
	9"	14"	16"	Madison	Rail	13"	17"	Angle	Head Support Systems			Deck Mount	Undermount
•				•	•	•		•	•	•	•	Yes	Yes

• = option is available




= standard on Platinum Series

= option is not available

**INSTALLATION TIPS**

- Install product according to our Owners manual and local codes.
- All units with an Airbath III may be 1 1/2 - 2 1/2" higher than stated.
- All whirlpool or Airbath™ unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- When ordering for undermount installation, always advise Americh to assure there are no issues with deck mounted controls.
- Cut-out dimension: 64" x 34"

Always check our website for the most updated specifications: [www.americh.com](http://www.americh.com)

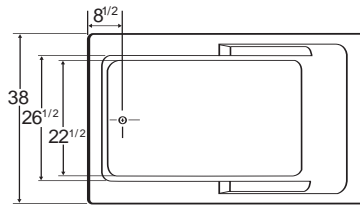

Tub pictured with optional grab bar and waste & overflow.

All bathtub dimensions are  $\pm 1/2$ ".

**CODES AND COMPLIANCE**

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8 • ASTM F462-79

Contact Americh for additional approvals.

**DIMENSIONS**

66" x 38" x 20" deep (1676 x 965 x 508 mm)


Whirlpool Operating Gallons = 50 (Liters = 190)

Gallons to Overflow = 86 (Liters = 326)


**ELECTRICAL REQUIREMENTS**

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.


**Builder Series**




**Luxury Series**




**Platinum Series**




**Combination (pump and blower location only)**



**Airbath System II**



**Airbath System III**



**LEGEND:**

- PUMP
- BLOWER
- JET
- ROTARY JET
- DUAL SUCTION
- LIGHT
- ON/OFF CONTROL
- GRAB BAR
- ACCESS PANEL (MINIMUM 16" x 20")

A C C E S S O R I E S													
Apron	Grab Bars					Pillow				Neck Massage	Tile Flange	Installation	
	9"	14"	16"	Madison	Rail	13"	17"	Angle	Head Support Systems			Deck Mount	Undermount
•				•	•	•		•	•	•	•	Yes	Yes

• = option is available




■ = standard on Platinum Series

□ = option is not available

**INSTALLATION TIPS**

- Install product according to our Owners manual and local codes.
- All units with an Airbath III may be 1 1/2 - 2 1/2" higher than stated.
- All whirlpool or Airbath™ unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- When ordering for undermount installation, always advise Americh to assure there are no issues with deck mounted controls.
- Cut-out dimension: 64" x 36"

Always check our website for the most updated specifications: [www.americh.com](http://www.americh.com)

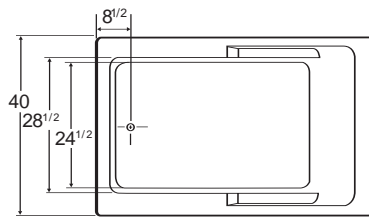

Tub pictured with optional grab bar and waste & overflow.

All bathtub dimensions are  $\pm 1/2''$ .

**CODES AND COMPLIANCE**

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8 • ASTM F462-79

Contact Americh for additional approvals.


**DIMENSIONS**

66" x 40" x 20" deep (1676 x 1016 x 508 mm)  
 Whirlpool Operating Gallons = 55 (Liters = 208)  
 Gallons to Overflow = 90 (Liters = 341)


**ELECTRICAL REQUIREMENTS**

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.


**Builder Series**




**Luxury Series**




**Platinum Series**




**Combination (pump and blower location only)**



**Airbath System II**



**Airbath System III**



**LEGEND:**

- PUMP
- BLOWER
- JET
- ROTARY JET
- DUAL SUCTION
- LIGHT
- ON/OFF CONTROL
- GRAB BAR
- ACCESS PANEL (MINIMUM 16" x 20")




A C C E S S O R I E S												
Apron	Grab Bars				Pillow				Neck Massage	Tile Flange	Installation	
	9"	14"	16"	Madison	Rail	13"	17"	Angle			Head Support Systems	Deck Mount
•				•	•			•	•	•	Yes	Yes

• = option is available      ■ = standard on Platinum Series      □ = option is not available

**INSTALLATION TIPS**

- Install product according to our Owners manual and local codes.
- All units with an Airbath III may be 1 1/2 - 2 1/2" higher than stated.
- All whirlpool or Airbath™ unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- When ordering for undermount installation, always advise Americh to assure there are no issues with deck mounted controls.
- Cut-out dimension: 64" x 38"

Always check our website for the most updated specifications: [www.americh.com](http://www.americh.com)

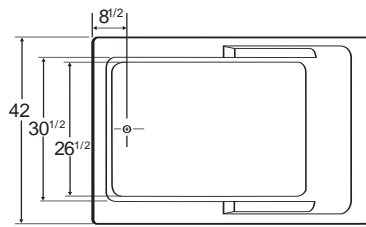

Tub pictured with optional grab bar and waste & overflow.

All bathtub dimensions are  $\pm 1/2$ ".

**CODES AND COMPLIANCE**

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8 • ASTM F462-79

Contact Americh for additional approvals.

**DIMENSIONS**

66" x 42" x 20" deep (1676 x 1067 x 508 mm)


Whirlpool Operating Gallons = 60 (Liters = 227)

Gallons to Overflow = 95 (Liters = 360)


**ELECTRICAL REQUIREMENTS**

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.


**Builder Series**




**Luxury Series**




**Platinum Series**




**Combination (pump and blower location only)**

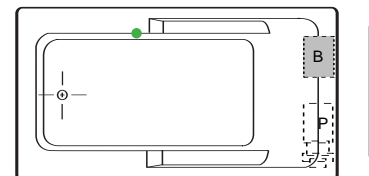

**Airbath System II**



**Airbath System III**



**LEGEND:**

- PUMP
- BLOWER
- JET
- ROTARY JET
- DUAL SUCTION
- LIGHT
- ON/OFF CONTROL
- GRAB BAR
- ACCESS PANEL (MINIMUM 16" x 20")




A C C E S S O R I E S													
Apron	Grab Bars				Pillow					Neck Massage	Tile Flange	Installation	
	9"	14"	16"	Madison	Rail	13"	17"	Angle	Head Support Systems			Deck Mount	Undermount
•				•	•	•		•	•	•	•	Yes	Yes

• = option is available     = standard on Platinum Series     = option is not available

**INSTALLATION TIPS**

- Install product according to our Owners manual and local codes.
- All units with an Airbath III may be 1 1/2 - 2 1/2" higher than stated.
- All whirlpool or Airbath™ unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- When ordering for undermount installation, always advise Americh to assure there are no issues with deck mounted controls.
- Cut-out dimension: 64" x 40"

Always check our website for the most updated specifications: [www.americh.com](http://www.americh.com)

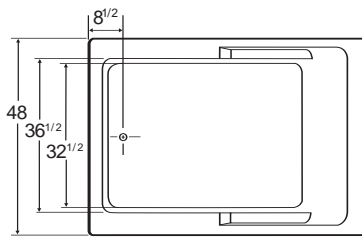

Tub pictured with optional grab bar and waste & overflow.

All bathtub dimensions are  $\pm 1/2$ ".

**CODES AND COMPLIANCE**

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8 • ASTM F462-79

Contact Americh for additional approvals.


**DIMENSIONS**

66" x 48" x 20" deep (1676 x 1219 x 508 mm)  
 Whirlpool Operating Gallons = 80 (Liters = 303)  
 Gallons to Overflow = 116 (Liters = 439)


**ELECTRICAL REQUIREMENTS**

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.


**Builder Series**




**Luxury Series**




**Platinum Series**




**Combination (pump and blower location only)**



**Airbath System II**



**Airbath System III**



**LEGEND:**

- P PUMP
- B BLOWER
- JET
- ROTARY JET
- DUAL SUCTION
- LIGHT
- ON/OFF CONTROL
- GRAB BAR
- ACCESS PANEL (MINIMUM 16" x 20")

A C C E S S O R I E S												
Apron	Grab Bars				Pillow				Neck Massage	Tile Flange	Installation	
	9"	14"	16"	Madison	Rail	13"	17"	Angle			Head Support Systems	Deck Mount
•				•	•	•	•	•	•	•	Yes	Yes

• = option is available      ■ = standard on Platinum Series      □ = option is not available

**INSTALLATION TIPS**

- Install product according to our Owners manual and local codes.
- All units with an Airbath III may be 1 1/2 - 2 1/2" higher than stated.
- All whirlpool or Airbath™ unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- When ordering for undermount installation, always advise Americh to assure there are no issues with deck mounted controls.
- Cut-out dimension: 64" x 46"