

LIGHTED MIRROR

WITH TUNABLE LED

SKU: 946559, 946562, 946565, 946564, 946566, 946561, 946560, 946563

BEFORE YOU BEGIN

A professional is required to complete the wiring for the mirror's light. Consult a licensed electrician. Signature Hardware accepts no liability for any damage to the home, product, or for personal injury during installation.

Observe all local plumbing and building codes.

Unpack and inspect the items for damage. If any damage is found, contact our Customer Relations team at 1-866-855-2284.

GETTING STARTED

- Ensure that you have gathered all of the required materials that are needed for the installation.
- Because the specification measurements are approximate and slight variations may occur, we highly recommend waiting until the mirror is on-site before starting rough-in procedures.

TOOLS AND MATERIALS:



Drill



Level



Tape Measure



Pencil



Stud Finder

BASIC FUNCTIONS

- Tap the power button to turn LED light on or off.
- Hold finger on the power button to change the color temperature. Release button once desired color temperature is reached.
- When the LED light is turned back on it will remain at the desired color temperature.

REVISED 01/15/2020


CODES: SHH0320, SHS1130, SHS3820, SHS2720, SHS5020, SHS0320, SHS0120, SHS2620

LIGHTED MIRROR

WITH TUNABLE LED


SKU: 946559, 946562, 946565, 946564, 946566, 946561, 946560, 946563

WIRING DIAGRAM

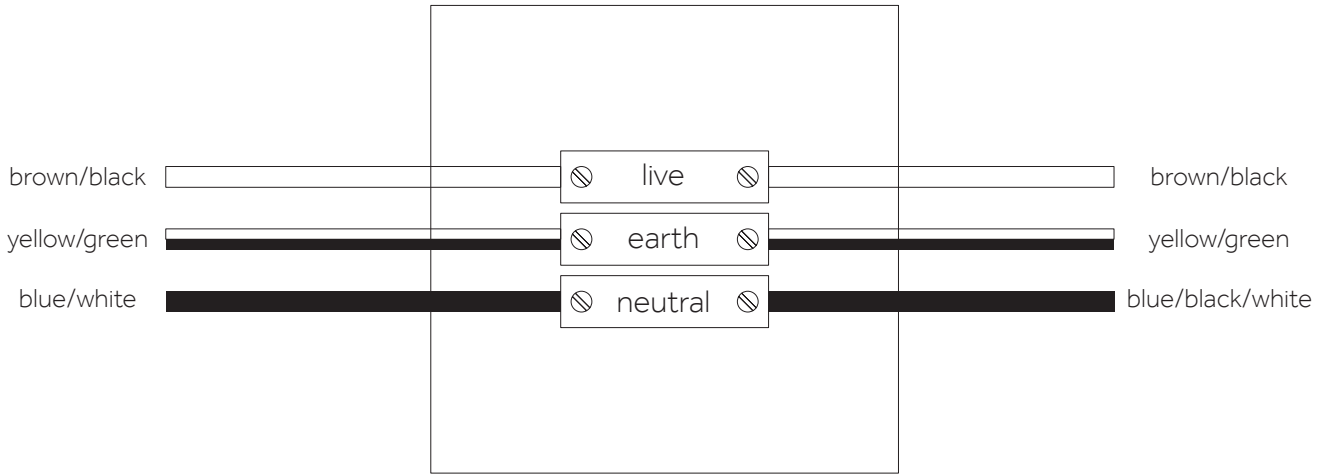


INSTALLATION (NO MOUNTING BRACKET)

1. Center the mirror above the sink at the appropriate height and draw a leveled outline of your cabinet on the wall.

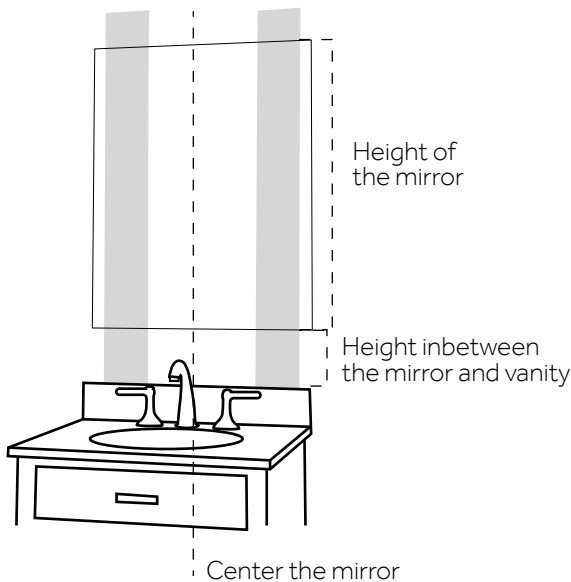

2. Locate and mark the position of the wall studs to which you will fasten your mirror. You can find studs by listening for a solid sound as you knock on the wall or by using a stud finder.

Tip: If the studs in your bathroom do not line up to the mounting location for your mirror, wood blocking can be installed between the studs using standard 2 x 4's.

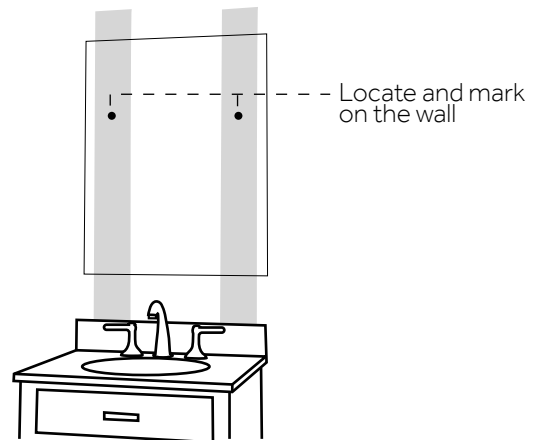


LIGHTED MIRROR

WITH TUNABLE LED

SKU: 946559, 946562, 946565, 946564, 946566, 946561, 946560, 946563

3. Secure the mirror to the wall studs with the mounting hardware (provided). Make sure that your mirror is level.

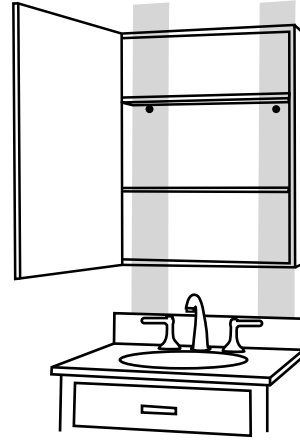

INSTALLATION (WITH MOUNTING BRACKET)

1. Center the mirror above the sink at the appropriate height and draw a leveled outline of your cabinet on the wall.

2. Locate and mark the position of the wall studs to which you will fasten your mirror. You can find studs by listening for a solid sound as you knock on the wall or by using a stud finder.

Tip: If the studs in your bathroom do not line up to the mounting location for your mirror, wood blocking can be installed between the studs using standard 2 x 4's.

3. Measure the location of the mounting rail on the back of the mirror to determine the location of your wall bracket. Use the top of the mirror as your guideline. Use your level to verify that the wall bracket is properly aligned.

4. Drill pilot holes and install the wall bracket. Because wall construction and materials vary from home to home, the appropriate mounting hardware may need to be purchased from your local hardware store. Consult a professional if you are unfamiliar with this type of installation.

5. With the help of another person, hang your mirror by attaching the mounting rail to the wall bracket.

